

Overview


****For latest information on this product please use [HPE Ethernet 1Gb Adapters QuickSpecs](#)****

HPE Ethernet 1Gb 4-port 366FLR Adapter

Recommended SKU - This adapter is a recommended option that has been selected by HPE experts to provide the right technology for a range of workloads and market segments offering the best combination of performance, value and availability.

The HPE Ethernet 1Gb 4-port 366FLR features the next generation of Ethernet integration offering in a single chip solution on a FlexibleLOM form factor, further reducing power requirements for 4 ports of 1 Gb Ethernet. The HP 366FLR is the PCI Express 2.1 x4 based on the latest Intel® Ethernet Controller I350 designed for use with select HPE ProLiant servers. Its FlexibleLOM form factor means customers now have choice to meet growing infrastructure needs.

The HPE 366FLR adapter supports advanced features such as Large Send offload capability, TCP checksum and segmentation, VLAN tagging, MSI-X, Jumbo frames, IEEE 1588, and virtualization features such as Intel Virtualization Technology for Connectivity, VMware NetQueue, Microsoft VMQ and WOL, and power management technologies like Energy Efficient Ethernet.

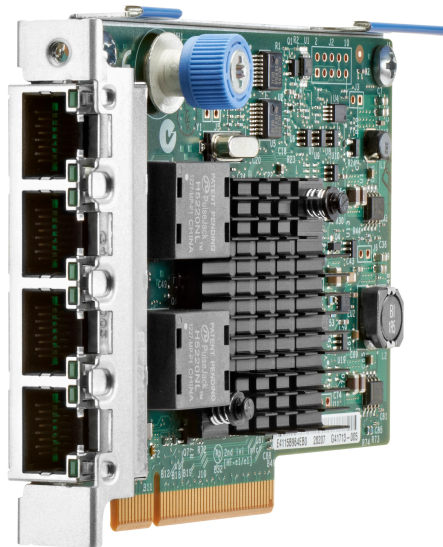

HPE Ethernet 1Gb 4-port 366FLR Adapter

Platform Information

Models

HP Ethernet 1Gb 4-port 366FLR Adapter 665240-B21

Kit Contents HP Ethernet 1Gb 4-port 366FLR Adapter
 Quick install card
 Product warranty statement

**Compatibility -
Supported Servers** HPE ProLiant DL20 Gen9 Server
 HPE ProLiant DL60 Gen9 Server
 HPE ProLiant DL80 Gen9 Server
 HPE ProLiant DL120 Gen9 Server
 HPE ProLiant DL160 Gen9 Server
 HPE ProLiant DL180 Gen9 Server
 HPE ProLiant DL360 Gen9 Server
 HPE ProLiant DL360 Gen10 Server
 HPE ProLiant DL380 Gen9 Server
 HPE ProLiant DL380 Gen10 Server
 HPE ProLiant DL385 Gen10 Server
 HPE ProLiant DL560 Gen9 Server
 HPE ProLiant DL580 Gen9 Server
 HPE ProLiant DL560 Gen10 Server
 HPE ProLiant DL580 Gen10 Server
 HPE Apollo 2000 - XL1x0r Gen9 Server
 HPE Apollo 4200 Gen9 Server
 HPE Apollo 4500 - XL450 Gen9 Server
 HPE Apollo 6000 - XL230b Gen9 Server
 HPE Apollo 6000 - XL250a Gen9 Server.

NOTE: This is a list of supported servers. Some may be discontinued

Standard Features

At a Glance Features

- FlexibleLOM for select HP Gen8 Rack servers
- Energy Efficient Ethernet (EEE) support
- Industry-leading hardware integration for low power
- Quad-port 1GbE provides up to 8 Gb/s full duplex throughput per adapter
- Optimized for virtual servers
- Improved small packet performance
- This adapter is compatible only with HPE FlexibleLOM slots available on select HPE ProLiant Gen8 rack and scale-out servers.
- Support for Preboot eXecution Environment (PXE)

Throughput-Theoretical Bandwidth

This adapter delivers 8 Gb/s bi-directional Ethernet transfer rate per port (32 Gb/s per adapter), providing the network performance needed to improve response times and alleviate bottlenecks.

NOTE: Port enumeration on this adapter is from the bottom up, i.e. the port near the top of the adapter is port #4 and the port closest to the gold finger is port #1.

10/100/1000T Twisted Pair Networks

In addition to Gigabit Ethernet, this adapter supports both 10 Mbps and 100 Mbps providing compatibility with Ethernet and Fast Ethernet twisted pair networks.

802.1Q VLANs

IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of this adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance.

Active Health System

Supports HPE Active Health System - monitors and records changes in the server hardware and configuration enabling customers to have accurate information that will assist in diagnosing problems and delivering rapid resolution when server failures occur.

Auto-negotiation

This adapter automatically senses the speed of the device to which it is attached. It also automatically configures for half or full duplex, depending on the duplex mode of the switch, hub, or router connected to the adapter.

Configuration Utilities

This adapter ships with a suite of operating system-tailored configuration utilities that allow the user to enable initial diagnostics and configure adapter teaming. This includes a patented teaming GUI for Microsoft Windows operating systems. Additionally, support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.

Energy Efficient Ethernet

Compliant with IEEE 802.3az, featuring advanced power savings features throttles power usage with network load activity.

Standard Features

| | |
|--|---|
| HPE Sea Of Sensors 3D | Support for the HPE Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can initiate fans and make other adjustments to reduce energy usage. A significant improvement lies in the ability to apply fan speed increases only to the portion of the system that is rising in temperature, rather than all six fans in unison, which reduces the amount of energy used for cooling. |
| Jumbo Frames | This adapter supports Jumbo Frames (also known as extended frames), permitting up to a 9,500 byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over six times the size of a standard 1500-byte Ethernet frame. With Jumbo Frames, networks can achieve higher throughput performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations. |
| LED Indicators | LED indicators show link integrity and network activity for easy troubleshooting. |
| Management Support | This adapter ships with agents that can be managed from HPE Systems Insight Manager or other management application that support SNMP. |
| Message Signaled Interrupt (Extended) (MSI-X) | Message Signaled Interrupt (Extended) provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores. |
| Network Adapter Teaming | This adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, the team of adapters can work together as a single virtual adapter, providing support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs. |
| Optimized for Virtualization | I/O Virtualization support for VMware NetQueue and Microsoft VMQ helps meet the performance demands of consolidated virtual workloads. |
| Preboot eXecution Environment (PXE) | Support for PXE enables automatic deployment of computing resources remotely from anywhere. It allows a new or existing server to boot over the network and download software, including the operating system, from a management/ deployment server at another location on the network. Additionally, PXE enables decentralized software distribution and remote troubleshooting and repairs. |
| Server Integration | <p>This adapter is a validated, tested, and qualified solution that is optimized for HPE ProLiant servers. Hewlett Packard Enterprise validates a wide variety of major operating systems drivers with the full suite of web-based enterprise management utilities including HPE Intelligent Provisioning and HPE Systems Insight Manager that simplify network management.</p> <p>This approach provides a more robust and reliable networking solution than offerings from other vendors and provides users with a single point of contact for both their servers and their network adapters.</p> |
| TCP/UDP/IP | For overall improved system response, this adapter supports standard TCP/IP offloading techniques including: |

Standard Features

TCP/IP, UDP checksum offload (TCO) moves the TCP and IP checksum offloading from the CPU to the network adapter. Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU.

Precision Time Protocol (IEEE 1588 PTP)

Synchronization of system clocks throughout a network, achieving clock accuracy in the sub-microsecond range, making it suitable for measurement and control systems.

Warranty

Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).

Minimum: One year limited warranty.

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>

Service and Support

Service and Support

NOTE: This adapter is covered under HPE Support Services/ Service Contract applied to the HPE ProLiant Server or enclosure. No separate HPE Support Services# need to be purchased.

Most HPE branded options sourced from HPE that are compatible with your product will be covered under your main product support at the same level of coverage, allowing you to upgrade freely. Additional support is required on select workload accelerators, switches, racks and UPS options 12KVA and over. Coverage of the UPS battery is not included under HPE support services; standard warranty terms and conditions apply.

Warranty and Support Services

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS options 12KVA and over. Coverage of the UPS battery is not included under TS support services; standard warranty terms and conditions apply.

Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support you need for your IT and business. Protect your product, beyond warranty.

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services. The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

For more information

Visit the Hewlett Packard Enterprise Service and Support [website](#).

Technical Specifications

| | | |
|--|--|--|
| System Unit | Dimensions (L x W) | 11.75 x 7.62 cm 4.63 x 3.0 in NOTE: without bracket |
| General Specifications | Network Processor | Intel® Ethernet Controller I350 |
| | Data Rate | Four 1GbE ports, each at 2 Gb/s bi-directional; 8 Gb/s aggregate bi-directional theoretical bandwidth. 10/100/1000 Mbps, Full-duplex. |
| | Data Path | Four lane (x4) PCI Express, mechanically compatible with x8 and x16 FlexibleLOM slots |
| | Bus type | PCI Express 2.0 (Gen2.1 x4) |
| | Form Factor | FlexibleLOM |
| | IEEE Compliance | 802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.1q, 802.3az, 1588, 802.1as |
| | Connector | RJ-45 (Four) |
| | Wiring | Category 5e (CAT-5e) or better twisted-pair cabling |
| | Cable Distance | Up to 328 ft (100 m) |
| Power and Environmental Specifications | Power | 5.5W maximum |
| | Temperature - Operating | 0° to 55°C (32° to 131°F) |
| | Temperature - Non-Operating | -65° to 85° C (-85° to 185° F) |
| | Humidity - Operating | 10% to 90% non-condensing |
| | Humidity - Non-operating | 5% to 95% non-condensing |
| | Emissions Classification | Class A |
| | Agency Approvals | USA: FCC Part 15 Class A Canada: ICES-003, Issue 4 Japan: VCCI V3 (2010.04) Class A International: EN55022:2006 + A1:2007 Class A; EN55024:1998+A1:2011+A2; EN61000-3-2:2006, EN61000-3-3:2008 Australia/New Zealand (AS/NZS): EN55022:2006+A12007 class A Korea: KN22 Class A, KN24 |
| | RoHS Compliance | 6 of 6 |
| | Safety | UL Mark (USA and Canada) CE Mark EN 60590 |
| Operating System and Virtualization Support | | |
| Environment-friendly Products and Approach - End-of-life Management and Recycling | <p>Hewlett Packard Enterprise offers end-of-life product return, trade-in, and recycling programs in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.</p> | |

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|--|
| 07-May-2018 | Version 8 | Changed | Compatibility section was updated |
| 05-Feb-2018 | Version 7 | Changed | Overview section was updated |
| 18-Dec-2017 | Version 6 | Changed | Product Information- Compatibility was updated |
| 16-Oct-2017 | Version 5 | Changed | Overview, Technical Specification- OS were updated. |
| 11-Jul-2017 | Version 4 | Changed | Compatibility section was updated. |
| 26-Oct-2016 | Version 3 | Changed | Re-branding edition. |
| 10-Sep-2013 | Version 2 | Changed | Compatibility, 10 Gigabit Server Adapters, and FlexibleLOM Servers were revised. |
| 19-Feb-2013 | Version 1 | New | QuickSpecs was created. |



Sign up for updates



© Copyright 2018 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

c04111405 - 14480 - Worldwide - V8 -07-May-2018